

Wine Guardian environmental control systems...superior performance and reliability for all of your residential and commercial wine room conditioning needs. Completely self-contained through-the-wall or remote systems provide optimal temperature and humidity control for the preservation and enjoyment of your wine investment.



Above, Wine Guardian application for a 10,000-bottle restaurant wine cellar. Inset, 1/4 ton Wine Guardian unit.

Standard Features

- 1/4 ton through 2 ton capacities, 3,000 BTU to 15,200 BTU, net output
- Multi-panel design provides easy access for service
- Lightweight, corrosion-resistant, all-aluminum outer body
- High static pressure fans for extended lengths of ductwork
- Multiple supply and return air openings
- Completely self-contained design
- Factory tested prior to shipment
- ETL and CSA approved
- 24/7 factory service hotline support
- Cleanable filter on evaporator coil


Options

- Low ambient protection
- Drip pad humidifier and humidistat
- Integral electric heat
- Duct kits and collars





Wine Guardian water-cooled unit with ductable supply and return evaporator section.

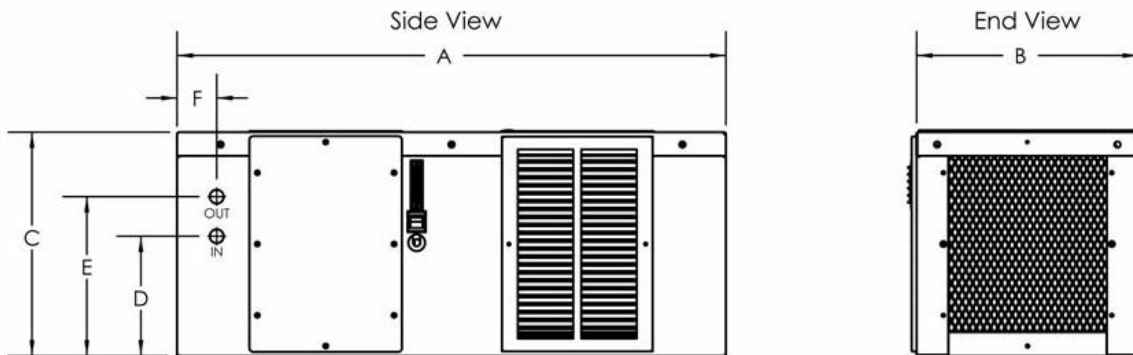

Specifications - Subject to Change

Model	Capacity	Pipe size	A	B	C	D	E	F	Electrical
1/4 Ton	3000 BTUH	1/2" In/out	35"	14"	14"	7.5"	10"	2.5"	115v/1ph/60hz
1/2 Ton	5300 BTUH	1/2" In/out	39"	22"	14"	7.5"	10"	2.75"	115v/1ph/60hz
1 Ton	7800 BTUH	1/2" In/out	39"	22"	14"	7.5"	10"	2.75"	230v/1ph/60hz
2 Ton	15200 BTUH	5/8" In/out	43"	22"	18"	10.5"	13"	2.75"	230v/1ph/60hz

Net capacities based on 55 Deg F/60% RH wine cellar, 80 Deg F condenser water temperature.